


Specifications

Models 191STMC/STMHC/SUMHC

Electrical connections		191STMC STMHC/SUMHC
Voltage	120V 1PH 50/60Hz .5amps	standard
Voltage	230V 1PH 50/60Hz .25amps	optional
Optional Iron Attachment:		
Voltage	120V 1PH 50/60Hz	Wattage 1000
	Approx. Consumption/hour	0.5 KWH
Steam and Air connection		
Steam Inlet	NPT	1/2"
Steam Outlet	NPT	1/2"
Rec. steam pressure	PSIG	75-85
	kPa	517-586
Steam consumption @ 80psig(552 kPa)	BHP	1
	kg/hr	15.6
Compressed air	NPT	3/8"
Air consumption	free air/cycle at 80psig	.20 cu.ft.
	free air/cycle at 552kPa	5.6 liters
Rec. air pressure	PSIG	80
	kPa	552
Air Vacuum Connection (for STMC/STMHC only)	NPT	1 1/4"
Weight (crated)		
Shipping	lbs	592
	kg	269
1 Control Push Buttons		4 Steam Outlet connection
2 Steam connection		5 Air Vacuum Connection- for STMC/STMHC only
3 Air connection		6 Electrical Connection

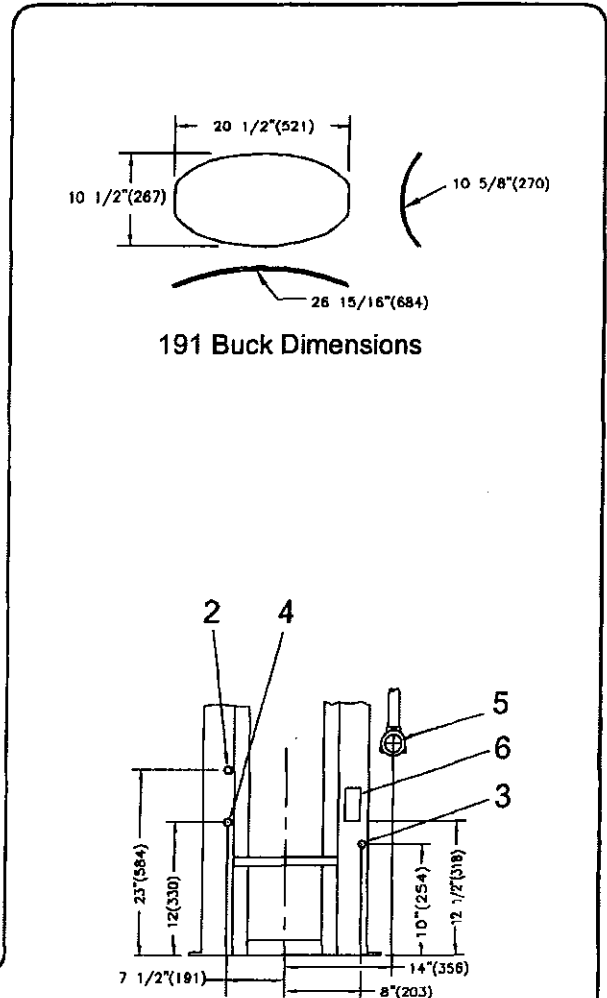

Detail Line Drawing (millimeters shown in parentheses)

