


# UP-N-DOWN STORAGE CONVEYOR

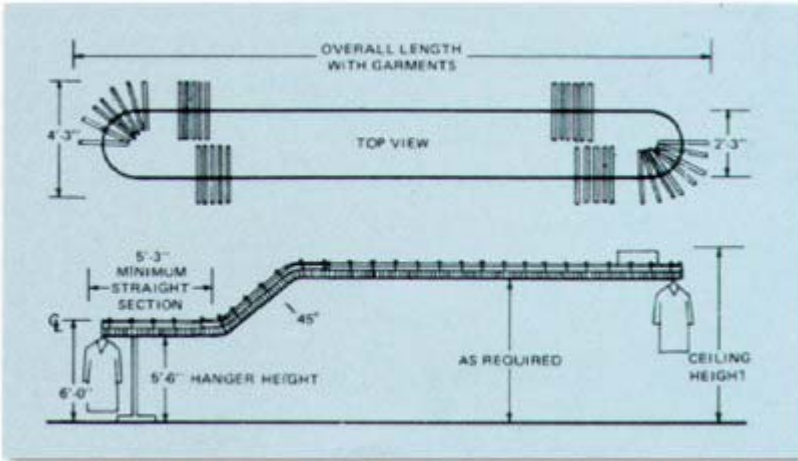

Use the overhead space of your store with the Up-N-Down model that goes up to the ceiling at a 45° angle. Load orders at the "nose" of the conveyor on ground level, and store them off the floor. Add extra square footage by using valuable floor space under the conveyor.

## Features:

- Bi-directional hand switch is standard
- Series 540 Automatic Keyboard control is optional. Microprocessor control selects shortest route to item location.
- 10 slot stamped steel frame, 12" pitch, 1.2# each, with nylon inserts.
- Hardened steel universal with heat-treated steel insert bushing.
- Screw-type take up for chain slack adjustment.

Model & No. of Slots	Length of Hanging Capacity	Overall Length with Garments*
GAN380	38'-0"	18'-0"
GAN400	40'-0"	19'-0"
GAN420	42'-0"	20'-0"
GAN460	46'-0"	22'-0"
GAN500	50'-0"	24'-0"
GAN540	54'-0"	26'-0"
GAN580	58'-0"	28'-0"
GAN600	60'-0"	29'-0"
GAN620	62'-0"	30'-0"
GAN660	66'-0"	32'-0"
GAN700	70'-0"	34'-0"
GAN740	74'-0"	36'-0"
GAN780	78'-0"	38'-0"
GAN800	80'-0"	39'-0"
GAN820	82'-0"	40'-0"
GAN860	86'-0"	42'-0"
GAN900	90'-0"	44'-0"
GAN920	92'-0"	45'-0"
GAN960	96'-0"	47'-0"
GAN1000	100'-0"	49'-0"

\*Based on 12 ft. ceiling.  
One hand switch furnished

## Head Room Chart

Ceiling Height	Head Room For 54" Bag
10'-0"	4' 3-1/2"
10'-6"	4' 9-1/2"
11'-0"	5' 3-1/2"
11'-6"	5' 9-1/2"
12'-0"	6' 3-1/2"
12'-6"	6' 9-1/2"
13'-0"	7' 3-1/2"
13'-6"	7' 9-1/2"
14'-0"	8' 3-1/2"

<b>Electrical</b>	115 Volt; 1 phase, 60 cycle
<b>Controls</b>	Bi-Directional Hand or Foot switch; as indicated
<b>Wiring</b>	Pre-wired for primary supply connection
<b>Speed</b>	75 ft./min.
<b>Colors</b>	Black is standard (other colors quoted by request)

**Steiner Atlantic Corp.**  
290 N.E. 68<sup>th</sup> Street  
Miami, FL 33138

Tel. (305) 754-4551  
(800) 333-8883  
Fax: (305) 751-8390

Email: sales@steineratlantic.com  
www.steineratlantic.com